

Stay safe.

RESiSecurity

NVR Recorder



Model
RESI-NVR16SR

Features

- Support Ultra265/H.265/H.264 video formats
- 16-channel input
- Plug & Play with 16 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 10TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade




High-Performance 4K NVR

The NVR supports up to 16 channels and records in 4K, with easy setup via 16 POE ports and compatibility with ONVIF cameras.

►► NVR Specifications

IP Video Input	16-ch
Two-way Audio Input	1-ch, RCA
Incoming Bandwidth	160Mbps
Outgoing Bandwidth	96Mbps
Protocols	P2P, UPnP, NTP, DHCP, PPPoE

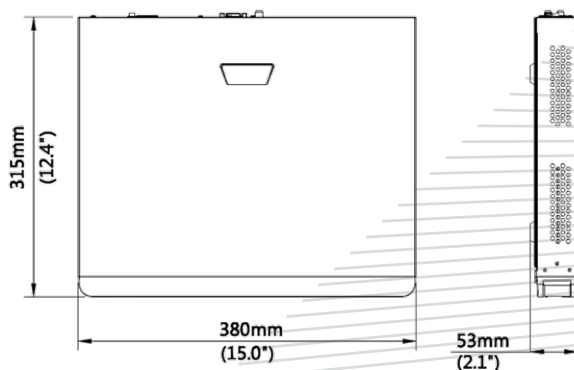

RESiSecurity

resisecurity.com

©2024- All rights reserved.
Product specifications and availability
subject to change without notice.

Stay safe.

RESiSecurity

NVR Recorder

Model
RESI-NVR16SR

▶▶ Video/Audio Output

HDMI/VGA Output	VGA: 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60 HDMI: 4k (3840x2160@30), 4k (3840x2160@60), 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16

▶▶ Decoding, PoE

Decoding format	Ultra265/H.265/H.264
Live view/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30, 16 x D1
PoE	
Interface	16 RJ-45 10M/100M self-adaptive Ethernet Interface
Max Power	Max 30W for single port / Max 240W in total
Supported Standard	IEEE 802.3af/at

▶▶ Hard Disk, Smart

HardDisk	
SATA	2 SATA interfaces
Capacity	up to 10TB for each disk

Smart	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
VCA Search	Face search, Behavior search
Statistical Analysis	People counting

▶▶ Interface, General

External Interface	
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0
Alarm In / Out	4-ch / 1-ch

General	
Power Supply	220V AC Power Consumption: ≤9 W (without HDD)
Working Environment	-10°C~+55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	380mm ×315mm × 53mm (15.0" × 12.4" × 2.1")
Weight (without HDD)	≤2.4kg (5.29lb)



+info

RESiSecurity

resisecurity.com

©2024- All rights reserved.

Product specifications and availability subject to change without notice.